



# Modern & Distinctive. Create a Natural & Timeless Look.

50-YEAR ROT WARRANTY | HIDDEN FIX SYSTEM



**Linax Cladding -** Virtually maintenance free and designed for leisure and off-site builds





## **Features**

- Finished product virtually maintenance free
- Available in lengths of 3.0m to 4.8m
- Will develop naturally to a silver grey tone
- **FSC** certified



# What is Linax?


- I Planed Redwood is UC3 high pressure treated
- I Hot Linseed Oil is added in a vacuum pressure tank which evaporates water from the timber
- I The linseed oil surrounds the UC3 treatment and this makes the product dimensionally stable.
- I Produced in Sweden from FSC certified forests.

# Benefits

- 50-year rot warranty(product must be registered within 90-days of purchase)
- 12-year product warranty on dimensional stability
- | Hidden fix jointing system




Profile Name	Dimension Act	Dimension Nom	Laid measure
HTL-V	18 x 142 mm	25 x1 50 mm	123 mm
HTL-C	19 x 144 mm	25x150 mm	125 mm
Corner Pieces	22 x 95 mm	25x100 mm	n/a

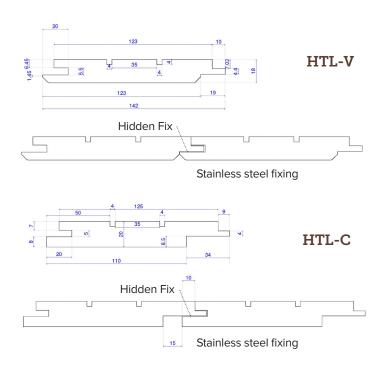



### The Linax Production Process

- I Planed Redwood is UC3 high pressure treated
- I It is left to dry for 48 hours before starting the Linax
- I Before the process starts, the timber is rotated 90 degrees. This allows all sides of the timber to be treated
- Hot linseed oil is added in a vacuum pressure tank which evaporates water from the timber.
- I The linseed oil surrounds the UC3 treatment and makes the product dimensionally stable.



### Linax Maintenance

Before maintenance oils are added;

- I The cladding should be dry and clean
- Any resin pockets that have developed should be scraped away
- I High pressure water cleaners are not recommended and may damage the Linax product and remove layer of treatment and invalidate warranties
- I Household detergents that do not contain bleach may be used.

### Linax Oil

- Available in 5L tins
- Used for touching up cut sections & maintenance
- Linax oil glaze is the only product suitable for Linax timber products
- | Will cover 4-6 / Litre on sawn surfaces such as cladding

