Bitus

Hawthorn Timber

Linax Cladding

Modern & Distinctive. Create a Natural & Timeless Look.

50-YEAR ROT WARRANTY | HIDDEN FIX SYSTEM

12 YEAR WARRANTY ON DIMENSIONAL STABILITY

Linax Cladding - Virtually maintenance free

www.hawthorntimber.co.uk 01482 228159 enquiries@hawthorntimber.co.uk

PART OF THE SUMMIT TIMBER GROUP

Features

- Finished product - virtually maintenance free
- Available in lengths of 3.0m to 4.8m
- Will develop naturally to a silver grey tone
- FSC® certified

FSC
www.fsc.org
FSC® C005948
The mark of responsible forestry

What is Linax?

- Planed Redwood is UC3 high pressure treated.
- Hot Linseed Oil is added in a vacuum pressure tank which evaporates water from the timber.
- The linseed oil surrounds the UC3 treatment and this makes the product dimensionally stable.
- Produced in Sweden from FSC certified forest. FSC® is dedicated to the promotion of responsible forest management worldwide.

Benefits

- **50-year rot warranty** (product must be registered within 90-days of purchase)
- **12-year product warranty on dimensional stability**
- **Hidden fix jointing system**

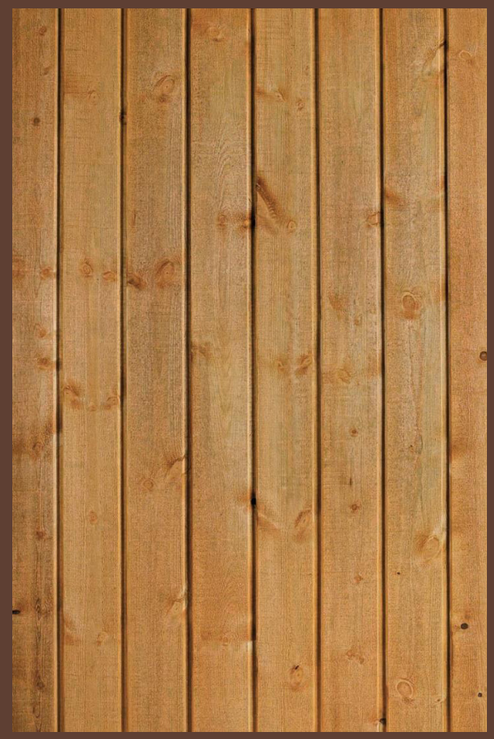

Profile Name	Dimension Act	Dimension Nom	Laid measure
HTL-V	18 x 142 mm	25 x1 50 mm	123 mm
Corner Pieces	22 x 95 mm	25x100 mm	n/a

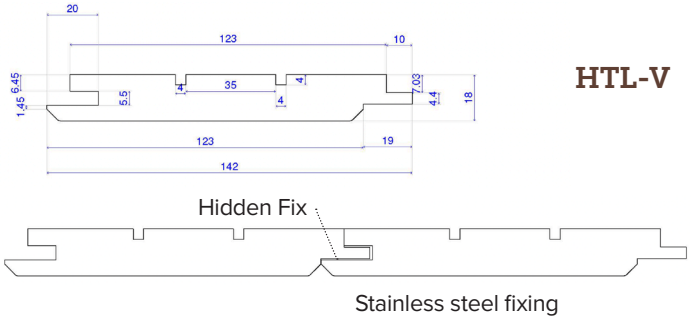

HTL-V

The Linax Production Process

- Planed Redwood is UC3 high pressure treated
- It is left to dry for 48 hours before starting the Linax
- Before the process starts, the timber is rotated 90 degrees. This allows all sides of the timber to be treated
- Hot linseed oil is added in a vacuum pressure tank which evaporates water from the timber.
- The linseed oil surrounds the UC3 treatment and makes the product dimensionally stable.

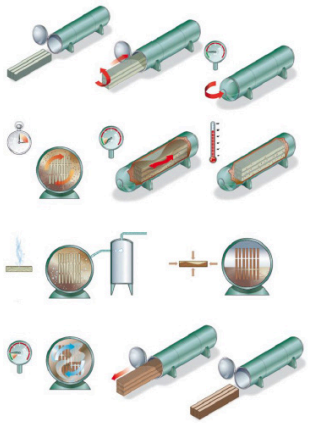

Linax Maintenance

Before maintenance oils are added;

- The cladding should be dry and clean
- Any resin pockets that have developed should be scraped away
- High pressure water cleaners are not recommended and may damage the Linax product and remove layer of treatment and invalidate warranties
- Household detergents that do not contain bleach may be used.

Linax Oil

- Available in 5L tins
- Used for touching up cut sections & maintenance
- Linax oil glaze is the only product suitable for Linax timber products
- Will cover 4-6 / Litre on sawn surfaces such as cladding